


Front Elevation View

Alternate conduit entry area
Use water tight fittings

Mounting ears
Screw fastened front cover
for installer access to
permanent connections.

Mechanical set screw or
compression lugs for
permanent cable connections.

(10) Cam-Loks
per phase and neutral,
(4) ground.
480V = brown, orange, yellow
208V = black, red, blue

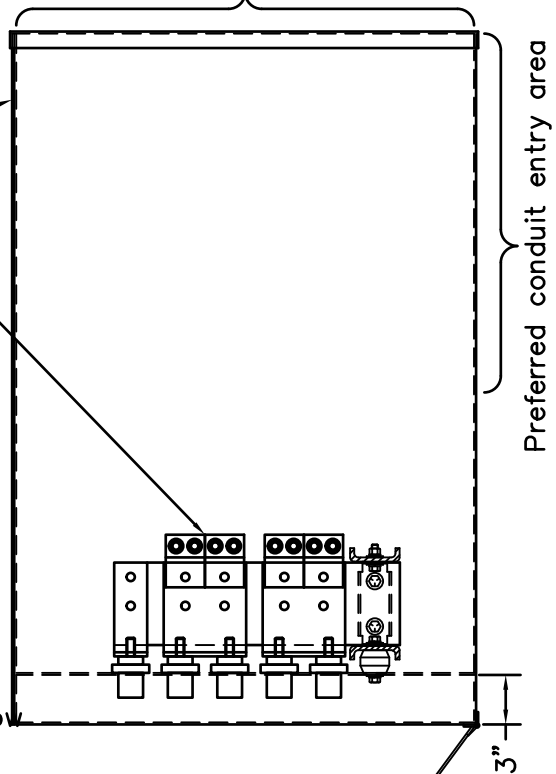

Right Side Elevation View

Locking
lift catch


1/4-turn padlockable
door catch

Cam-Lok
access door


Generator Connection Cabinet
Catalog #W40- $\{3,4,5\}\{S,C,P\}$ -M
4000A, max. 480V., 3Ph, 4W, 35kAIC

Construction Notes (standard):

Mat'l: Aluminum
Finish: Bare aluminum
NEMA 3R construction

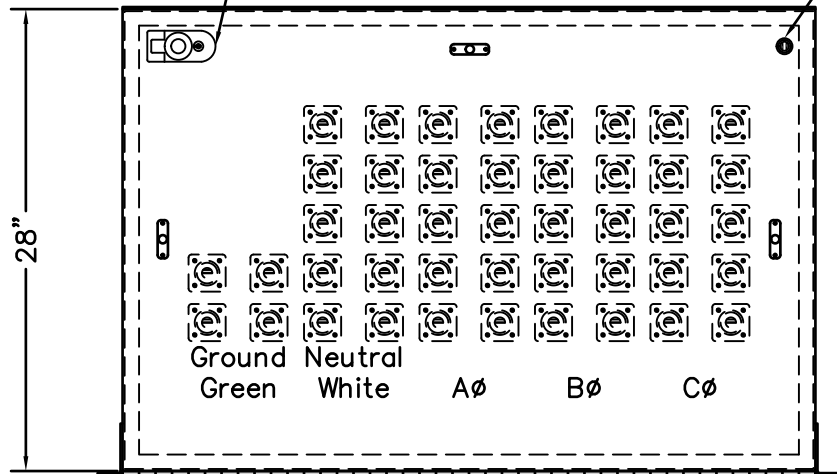

Bottom View (looking up)



Berthold Electric Co.

1900 W. Carroll Ave.

Chicago, IL 60612

(800) 657-6650 www.genconcab.com

DESCRIPTION:
Generator Connection Cabinet
4000A, max. 480V., 35kAIC

DRAWN: RCB

SCALE: 1=12

DRAWING NO.

DATE: 11-6-15

DWG. SIZE: A

GCC-C